


TB 110 | TRUCK-MOUNTED TELESCOPIC BELT CONVEYOR

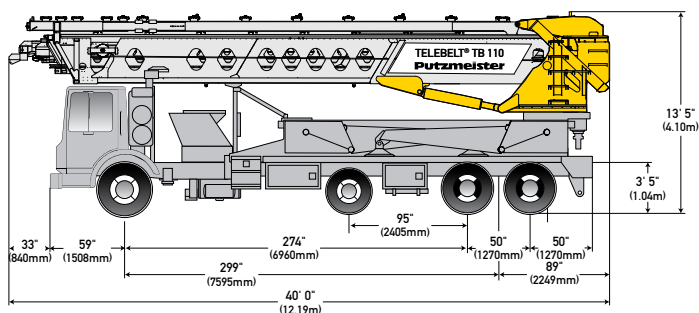

BELT CONVEYOR | SPECIFICATIONS

Conveyor horizontal reach

Maximum at 0°	106' 1"	(32.34m)
Maximum at 30°	91' 6"	(27.91m)

Conveyor belt width	18"	(457mm)
---------------------	-----	---------

Feed conveyor length	38' 0"	(11.60m)
----------------------	--------	----------

Feed conveyor belt width	18"	(457mm)
--------------------------	-----	---------

Trunk/end hose length	15' 0"	(4.57m)
-----------------------	--------	---------

Discharge height from grade

Maximum at 30°	60' 2"	(18.36m)
Maximum at -15°	-20' 0"	(-6.11m)

Main and feed conveyors

Observed capacity at 0°	5.00 yd ³ /min	(4.00m ³ /min)
Observed capacity at 20°	5.00 yd ³ /min	(4.00m ³ /min)

Transport axle weights ** • †


Steering	19,008 lbs	(8,621kg)
Pusher	10,000 lbs	(4,535kg)
Tandem	33,754 lbs	(15,309kg)
Total	62,762 lbs	(28,465kg)

** Truck dimensions will vary with different truck makes, models and specifications.

• Weights are approximate and include conveyor truck, fuel, driver and 100 gal (379L) of water.

† All specifications apply to units mounted on Mack MRU 613.

OUTRIGGER LOADS | FRONT AND REAR



Front	30,350 lbf	(135 kN)
Rear	34,395 lbf	(153 kN)