


28Z-METER | TRUCK-MOUNTED CONCRETE BOOM PUMP

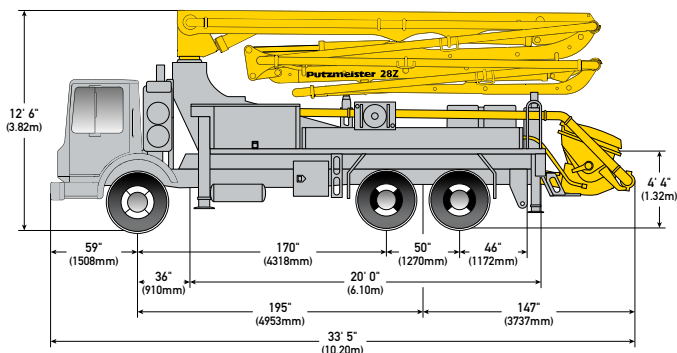

MODEL SPECIFICATIONS

Vertical reach	89' 7"	(27.31m)
Horizontal reach	78' 1"	(23.80m)
Reach from front of truck	69' 2"	(21.08m)
Reach depth	54' 6"	(16.60m)
Unfolding height	21' 4"	(6.50m)
Available pump cells		.09, .12H, .16H
Front axle weight	15,900 lbs	(7,200kg)
Rear axle weight	30,500 lbs	(13,800kg)
Approximate total weight	46,400 lbs	(21,000kg)

Ergonic Pump System (EPS) is standard.


Based on Model MACK MRU 613 with .16H pump cell.

BOOM | MULTI-Z DESIGN

1st section length	23' 0"	(7.00m)
2nd section length	18' 4"	(5.59m)
3rd section length	18' 4"	(5.59m)
4th section length	18' 4"	(5.59m)
Maximum end hose length	10' 0"	(3.00m)
Maximum end hose weight allowance	365 lbs	(166kg)

Please follow end hose weight guidelines listed in operational manual.

OUTRIGGER LOADS | FRONT AND REAR



Front	33,721 lbf	(150 kN)
Rear	25,853 lbf	(115 kN)